


X-Panel 4343a FQI-H

a-Si X-ray flat panel detector

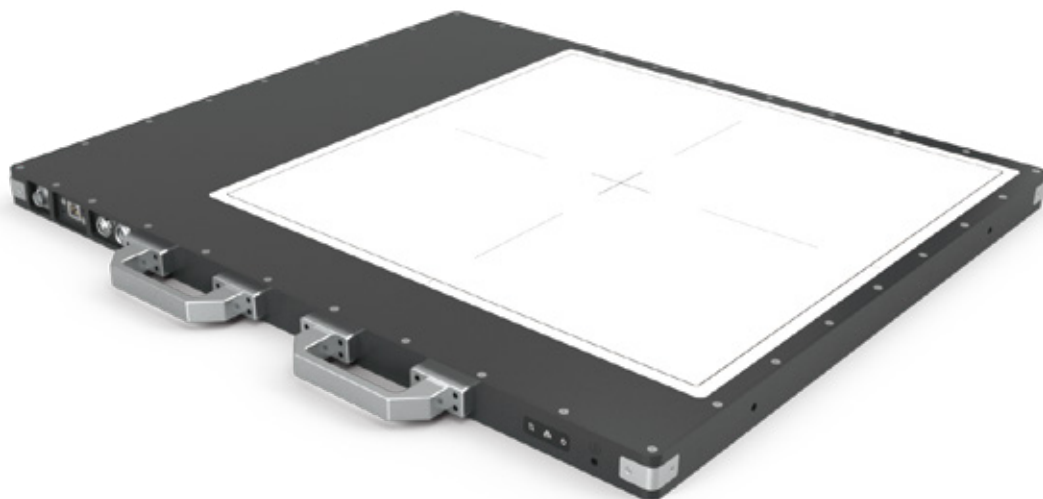

Key Features

- 12 fps frame rate, high positioning accuracy
- Dynamic imaging
- Ingress Protection rating of IP65
- 16MV high-energy protection design
- Direct evaporation coupled Cesium Iodide (CsI) Scintillator effectively reduces light scattering between pixels

X-Panel 4343a FQI-H is a 43 x 43 cm fixed type, amorphous silicon, dynamic flat panel detector. It features excellent sensitivity and high dynamic range modes, the structural epitaxial radiation shield design offers user flexibility, and external protection. The 16MV high-energy is an optimal solution in industrial high-energy non-destructive testing (NDT) applications.

Applications



Technical Specifications

Technology	
Sensor	a-Si
Scintillator	CsI / GOS
Active Area	430 x 430 mm
Pixel Matrix	3072 x 3072
Pixel Pitch	140 μ m
AD Conversion	16 bits
Interface	
Data Interface	Optical Fiber
Exposure Control	Pulse Sync In / Pulse Sync Out
Work Mode	Software Mode / HVG Sync Mode / FPD Sync Mode
Frame Speed	12fps (1x1) / 24fps (2x2)
Operating System	Windows7 / Windows10 OS 32 bits or 64 bits
Technical Performance	
Resolution	3.5 lp/mm
Energy Range	\leq 16 MV
Lag	0.8% @ 1st frame
Dynamic Range	\geq 86 dB
Sensitivity	620 lsb/uGy
SNR	49 dB @ (2000lsb)
MTF	72% @ (1 lp/mm) 44% @ (2 lp/mm) 25% @ (3 lp/mm)
DQE (2uGy)	66% @ (0 lp/mm) 42% @ (1 lp/mm) 28% @ (2 lp/mm)
Mechanical	
Dimension(H x W x D)	630 x 540 x 30 mm
Weight	15.1 Kg
Sensor Protection Material	Carbon Fiber
Housing Material	Aluminum Alloy
Environmental	
Temperature Range	10~35°C (operating) ; -10~50°C (storage)
Humidity	30~70% RH (non-condensing)
Vibration	IEC 60068-2-64 Operation: 1G, 5-500Hz
Shock	IEC 60068-2-27 Operation: 2G, duration 11ms
Dust and Water Resistant	IP65
Power	
Supply	100~240 VAC
Frequency	50/60 Hz
Consumption	17.5 W

